

Dura Fit®... tackles tough weather and does it handsomely


Dura Fit® roofing and siding is engineered to stay bright, tight and durable for years to come. With crisp chalk-free colors, an appealing profile and rugged no-nonsense construction, Dura Fit® is a cost-efficient contemporary building material perfect for a wide variety of agricultural, light industrial, commercial, and residential applications.

The heart of Dura Fit® durability is full hard, 100,000+ psi high tensile strength galvanized steel. Our exclusive computer-aided profile design incorporates a no-leak drain channel and adds rigidity and strength, assuring tight side laps and a dry, snug interior even under the most adverse weather conditions and years of hard use.

Dura Fit® Uses WeatherX Coatings Technology

WeatherX coatings are renowned for their gloss retention, color robustness, and superior chalking resistance. WeatherX technology merges durable ceramic and other select inorganic pigments with the strength of Valspar's proprietary silicone polyester resin to fight the detrimental effects of the sun's ultraviolet rays, rain, humidity, and weathering. Furthermore, this paint system provides superior abrasion resistance to minimize cracking or marring from fabrication, transit, and construction. SR WeatherX color formulas meet or exceed the minimum requirements for an Energy Star® rating.


COLORS

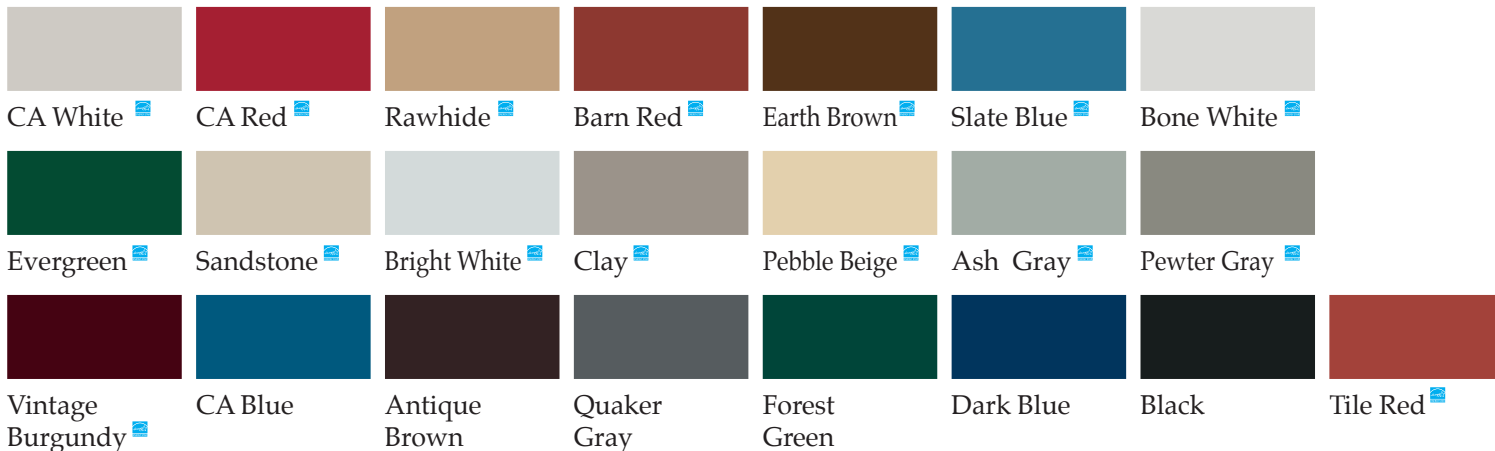

Also available in Galvanized and Galvalume.

Note: Due to the limitations of the printing process, the colors shown above may be slightly different from the actual metal panels. For critical color matches, please ask your account representative for painted metal samples.

PROFILE

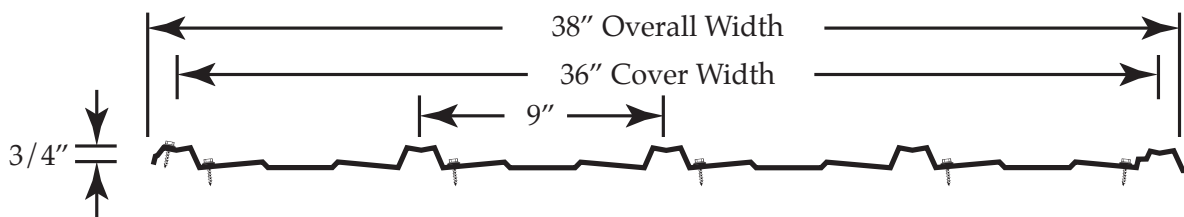

QUICK SPECS

- Full-hard 100,000+ psi high tensile galvanized steel
- Popular 38" width (36" coverage) in lengths from 1 through 45 feet in even one inch increments
- Available in Galvanized G-90, Galvalume and twenty-two rich baked-on colors
- 28 gauge (26 gauge on special order)
- 40 Year Limited Warranty

Allowable Distributed Loads (lbs/sq ft)						
Span Load	2' 0"	2' 6"	3' 0"	3' 6"	4' 0"	5' 0"
	126	81	56	41	31	25

Notes:

1. Minimum yield stress is to be no less than 80,000 psi.
2. Based on 3 or more continuous spans.
3. Above loads are based on L/180 deflection criteria.
4. Minimum bearing length of no less than 1.5 inches was assumed for all calculations.

LAP DETAIL



(stitch screws at installer's discretion)



CAN-AMERICAN CORRUGATING CO. LTD.

www.canamerican.ca Margaret, MB

Tel: 1-204-776-2081

Fax: 1-204-776-2238

Toll Free: 1-866-776-2081

